





www.diamondwire.com

# EXTENSION SPRINGS SPECIFICATION FORM

END STYLE	I	II	III	IV
	MACHINE LOOPS	CROSSOVER	SIDE LOOPS	EXTENDED HOOKS
LOOP TYPE				
RECOMMENDED LOOP LENGTH.				
MIN	1/2 I.D.	I.D.	I.D.	1.1 x I.D.
MAX	1.1 x I.D.	I.D.	I.D.	AS REQUIRED

LOOP/HOOK (A) LENGTH \_\_\_\_\_ +/- \_\_\_\_\_ OPENING \_\_\_\_\_ +/- \_\_\_\_\_  
 LOOP/HOOK (B) LENGTH \_\_\_\_\_ +/- \_\_\_\_\_ OPENING \_\_\_\_\_ +/- \_\_\_\_\_

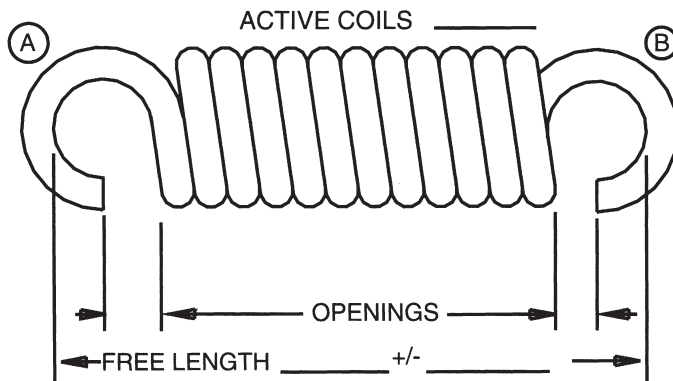

INDICATE UNITS OF MEASURE (IN & LB), (MM & KG)

- MATERIAL \_\_\_\_\_
- WIRE DIA. \_\_\_\_\_
- DIRECTION OF WIND OPT, LH, RH
- END STYLE (A) I, II, III, IV (B) I, II, III, IV (SEE ABOVE)
- IT \_\_\_\_\_ +/- \_\_\_\_\_
- RATE \_\_\_\_\_ +/- \_\_\_\_\_ BETWEEN \_\_\_\_\_ & \_\_\_\_\_
- LOAD 1 \_\_\_\_\_ +/- \_\_\_\_\_ @ \_\_\_\_\_
- LOAD 2 \_\_\_\_\_ +/- \_\_\_\_\_ @ \_\_\_\_\_
- MAXIMUM EXTENDED LENGTH (INSIDE ENDS) WITHOUT SET \_\_\_\_\_
- RELATIVE LOOP POSITION: \_\_\_\_\_ RANDOM OR \_\_\_\_\_ ALIGNED AT \_\_\_\_\_ DEGRESS +/- \_\_\_\_\_ DEGREES
- FINISH \_\_\_\_\_
- FREQUENCY OF EXTENSION \_\_\_\_\_ CYCLES/SEC. AND WORKING RANGE \_\_\_\_\_ IN. TO \_\_\_\_\_ IN. OF LENGTH

13. OPERATING TEMP. \_\_\_\_\_ °F

14. OTHER: \_\_\_\_\_

COMPANY:
ADDRESS:
CITY: _____ ST: _____ ZIP: _____
CONTACT:
PHONE:
FAX:
EMAIL:
QUANTITIES TO BE QUOTED:
END USE OR APPLICATION: